





Certified

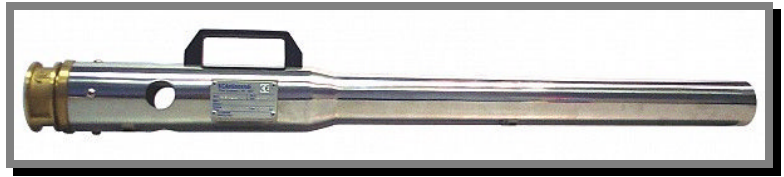

LSB-2
LSB-4

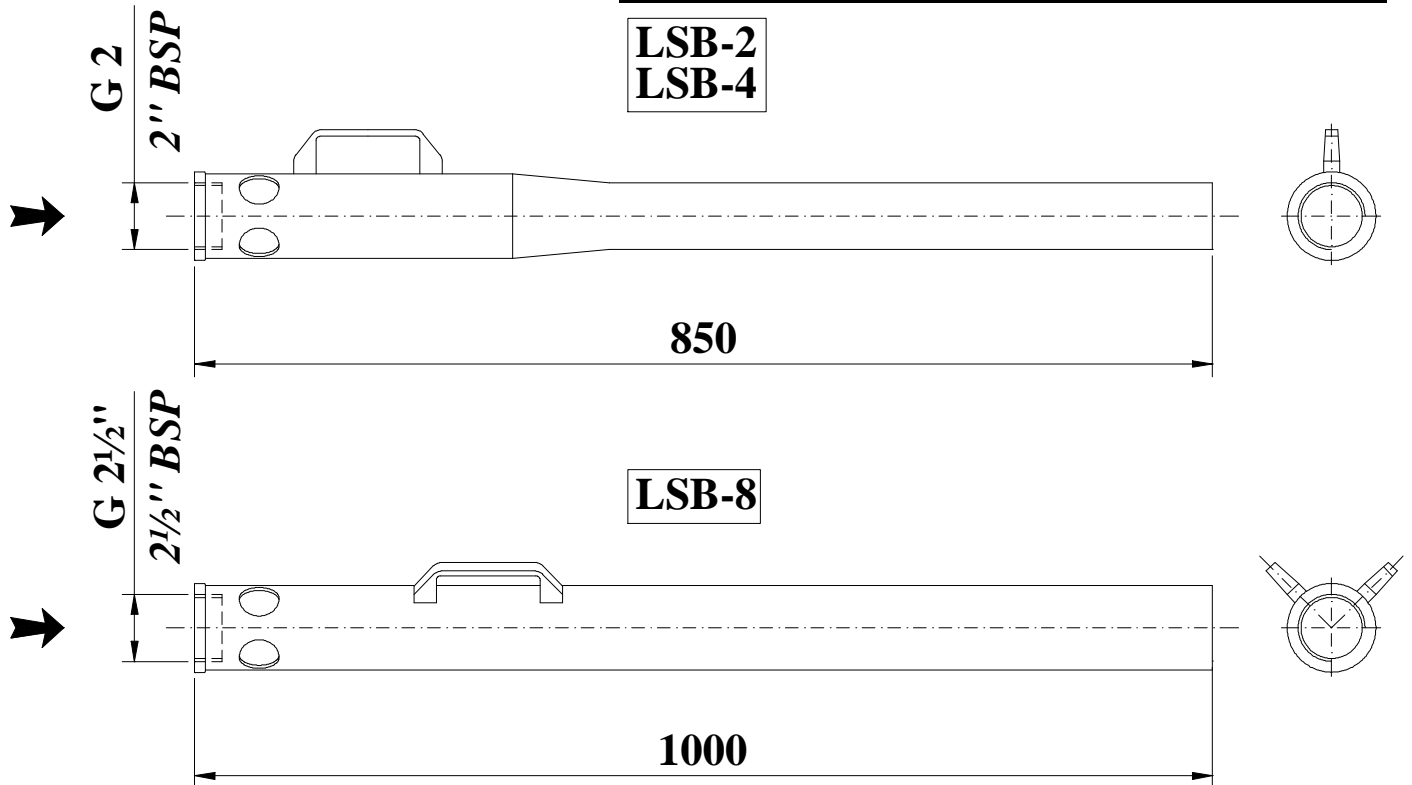

Le misure sono in mm
Dimensions are in mm

CARATTERISTICHE COSTRUTTIVE

- Corpo in acciaio inox AISI 316
- Ugello in ottone
- Finitura: naturale

A RICHIESTA

- Dimensioni diverse dallo standard
- Connessioni: UNI-45, UNI-70, STORZ, BSS, NH, altre

CONSTRUCTION FEATURES

- Body material: stainless steel AISI 316
- Nozzle material: brass
- Finish: natural

OPTIONAL

- Dimensions different to standard
- Connections types: UNI-45, UNI-70, STORZ, BSS, NH, others

MOD. MODEL	PORTATA FLOW RATE l/min.-5 bar	PRESSIONE ESERCIZIO WORKING PRESSURE bar	RESA SCHIUMA FOAM PRODUCTION (1) (2) l/min. - 5 bar	GITTATA THROW m - 5 bar	PESO WEIGHT Kg
LSB-2	225	4 ÷ 8 MAX	1350	20	4
LSB-4	450	4 ÷ 8 MAX	2700	25	4
LSB-8	800	4 ÷ 8 MAX	4800	28	6.8

(1) Dipende dal tipo di schiumogeno.

(2) Rapporto di espansione: 6:1 a 5 bar

(1) Depending on foam concentrate type.

(2) Expansion ratio: 6:1 at 5 bar